

HD 7/11-4 CAGE CLASSIC

Long service intervals and high-quality components such as the crankshaft pump with ceramic piston are among the many strengths of the HD 7/11-4 Cage Classic single-phase pressure washer.







Order no.


1.367-318.0

- Durable crankshaft pump with ceramic-coated pistons
- Robust tubular frame construction for maximum protection
- Wall mounting possible

| Technical data | | |
|---------------------------|-------------|-------------------|
| EAN code | | 4054278131665 |
| Current type | Ph / V / Hz | 1 / 230 / 50 |
| Flow Rate | l/h | 520 - 700 |
| Water feed temperature | °C | 60 |
| Operating pressure | bar / MPa | 70 - 110 / 7 - 11 |
| Max. Pressure | bar / MPa | 150 / 15 |
| Power rating | kW | 2.9 |
| Weight (with accessories) | kg | 50.5 |
| Weight incl. packaging | kg | 60.8 |
| Dimensions (L × W × H) | mm | 640 × 360 × 500 |

| Equipment | | |
|---|----|--------------------|
| Trigger gun | | Standard |
| High-pressure hose | m | 10 / DN 6, 250 bar |
| Stainless steel spray lance | mm | 600 |
| Power nozzle | | - |
| Anti-twist system (AVS) | | |
| Infinitely variable pressure and water flow control on the unit | | |
| Crankshaft pump with ceramic | | |
| pistons | | - |
| Included in delivery. | | |



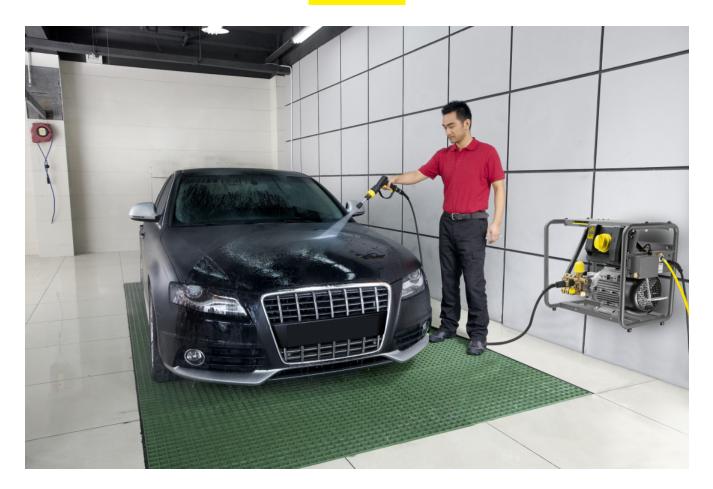



Durable and reliable

- 4-pole electric motor.
- Brass cylinder head and ceramic piston.
- Reliable crankshaft pump with additional thermostat valve.



Robust and secure

- Robust tubular frame construction ensures optimum protection of the machine.
- Built-in handles for transport.



Service-friendly

- Excellent access to all relevant components.
- Large water inlet filter for easy servicing.

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0



| | | Order no. | Description | | |
|---------------------------------|----|-------------|--|------|--|
| TRIGGER GUNS | | | | | |
| Standard trigger gun | 1 | 9.751-139.0 | High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22×1.5 . | | |
| EASY!Force Advanced | 2 | 4.118-005.0 | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. | | |
| Conversion kit 2 from device | 3 | 4.111-051.0 | Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose. | | |
| KÄRCHER POWER NOZZLE | | | | | |
| Power nozzle spray angle 25° | | | | | |
| Power Nozzle 25°, 050 | 4 | 2.883-399.0 | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains | S. 🔳 | |
| HP nozzle spray angle 0° | | | | | |
| Power Nozzle 0°, 050 | 5 | 2.884-535.0 | High-pressure nozzle with powerful jet for extremely stubborn dirt. | | |
| Power nozzle spray angle 15° | | | | _ | |
| Power Nozzle 15°, 055 | 6 | 2.883-390.0 | Fan jet nozzle with 15° spray angle suitable for stubborn dirt. | | |
| Power nozzle spray angle 40° | | | | _ | |
| Power Nozzle 40°, 050 | 7 | 2.884-524.0 | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. | | |
| SPRAY LANCES | | | | | |
| Rotating spray lances | | | | | |
| Spray lance, 600 mm, rotatable | 8 | 4.760-664.0 | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | | |
| Spray lance, 840 mm, rotatable | 9 | 4.760-663.0 | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | | |
| Spray lance, 1050 mm, rotatable | 10 | 4.760-660.0 | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | | |
| Spray lance, 1550 mm, rotatable | 11 | 4.760-661.0 | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | | |
| Spray lance, 2050 mm, rotatable | 12 | 4.760-662.0 | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | | |
| Spray lance | | I | 1 | _ | |
| Lance 250 mm, non-rotatable | 13 | 4.760-667.0 | 250 mm stainless steel lance. With manual coupling. Non-rotatable. | | |
| 550 mm lance, non-rotatable | 14 | 4.760-665.0 | 550 mm stainless steel lance. With manual coupling. Non-rotatable. | | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0



| | | Order no. | Description | | | |
|---|----|-------------|---|------|--|--|
| SPRAY LANCES | | | | | | |
| Spray lance | | | | | | |
| Jet pipe for replacement 600mm | 15 | 9.751-140.0 | | | | |
| Angular spray lance | | | | | | |
| WC and gutter lance | 16 | 4.760-073.0 | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. | | | |
| Flexible spray lance | | | | | | |
| Flexible lance, 1050 mm | 17 | 6.394-654.0 | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. | | | |
| High pressure articulated joint | 18 | 4.481-039.0 | High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer. | | | |
| Undercarriage spray lance | | | | | | |
| Underbody lance | 19 | 4.760-245.0 | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. | | | |
| ROTARY NOZZLES (DIRT BLASTERS) | | | | | | |
| Dirt Blaster, small | | | | | | |
| Dirt Blaster Nozzle, 050 | 20 | 4.767-233.0 | Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor. | | | |
| Dirt blaster, large | | | | | | |
| Dirt Blaster Nozzle, 050 | 21 | 4.763-253.0 | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. | e 🗆 | | |
| MULTIPLE-JET NOZZLES | | | | | | |
| Triple nozzles | | | | | | |
| Triple Nozzle, 053 | 22 | 4.767-155.0 | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5. | | | |
| HIGH-PRESSURE HOSES | | | | | | |
| Standard with unions on both sides | | | | | | |
| High-pressure hose, 10 m, DN 8, 315 bar, 2 × M22 × 1.5 | 23 | 6.391-342.0 | To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 $	imes$ 1.5 | j. 🗆 | | |
| High-pressure hose, 15 m, DN 8, 315 bar, 2 × M22 × 1.5 | 24 | 6.390-010.0 | With rotary coupling, 2 × M 22 × 1.5 | | | |
| High-pressure hose, 20 m, DN 8, 315 bar, 2 × M22 × 1.5 | 25 | 6.390-031.0 | With M 22x1.5 union at both ends and anti-kink protection ID 8/155°C/315 bar | | | |
| High-pressure hose, 30 m, DN 8, 315 bar, 2 × M22 × 1.5 | 26 | 6.390-293.0 | With rotary coupling, 2 × M 22 × 1.5 | | | |
| Longlife 400 with unions on both sides | | | · | | | |
| High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 × M22 × 1.5 | 27 | 6.390-178.0 | 1.5 m high-pressure hose (DN 8, M 22 \times 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 \times 1.5). | | | |
| High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 × M22 × 1.5 | 28 | 6.388-083.0 | 10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 × 1.5, with kink protection. | | | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0



















| | | Order no. | Description | | |
|--|----|-------------|--|---|--|
| HIGH-PRESSURE HOSES | | | | | |
| Longlife 400 with unions on both sides | | | | | |
| High-pressure hose Longlife, 15 m, DN 8, 400 bar, 2 × M22 × 1.5 | 29 | 6.389-709.0 | With rotary coupling, $2 \times M 22 \times 1.5$ | | |
| High-pressure hose Longlife, 20 m, DN 8, 400 bar, 2 × M22 × 1.5 | 30 | 6.390-027.0 | with rotary coupling, $2 \times M 22 \times 1.5$ | Τ | |
| High-pressure hose Longlife, 30 m, DN 8, 400 bar, 2 × M22 × 1.5 | 31 | 6.390-294.0 | With rotary coupling, 2 × M 22 × 1.5 | T | |
| PIPE CLEANING | | | | 1 | |
| Pipe cleaning hose, ID 6 | | | | _ | |
| Hose assembly TR pipe cleaning DN6 max.2 | 32 | 6.110-046.0 | The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | I | |
| Pipe cleaning hose | 33 | 6.390-028.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | T | |
| Pipe cleaning hose, DN 6, 20 m, 220 bar | 34 | 6.110-008.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R $1/8$ nozzle). | | |
| Pipe cleaning hose, DN 6, 30 m | 35 | 6.390-029.0 | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | T | |
| Hose assembly TR pipe cleaning DN6 max.2 | 36 | 6.110-047.0 | The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | | |
| Pipe cleaning hose, DN 6, 20 m, 220 bar | 37 | 6.390-030.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). | | |
| Pipe cleaning nozzle | | | | | |
| Dirt blaster pipe cleaning D21/060 | 38 | 4.765-002.0 | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted | | |
| Dirt blaster pipe cleaning D30/060 | 39 | 4.765-005.0 | jets ensure the necessary forward movement, as well as convenient handling. | ľ | |
| Pipe cleaning nozzle | 40 | 5.763-015.0 | 16 mm pipe cleaning nozzle with internal thread. Various jet directions for | 1 | |
| | 41 | 5.763-016.0 | environmentally-friendly cleaning of blocked drains and pipes. | | |
| | 42 | 5.763-017.0 | 30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. | - | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0

| | | 6, 55 | $ \begin{bmatrix} \begin{bmatrix}$ | |
|---|----|-------------|--|---|
| | | Order no. | Description | |
| PIPE CLEANING | | | | |
| Pipe cleaning nozzle Rotating pipe cleaning nozzle | 43 | 6.415-428.0 | Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes. | |
| FLOOR AND HARD SURFACE CLEANER | | | | |
| Hard Surface Cleaner FRV 30 | | | | |
| FRV 30 | 44 | 2.642-999.0 | With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. Machine specific nozzle kit must be ordered separately. | |
| Add-on kit rubber lip | 45 | 2.642-910.0 | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. | |
| Extension hose 5 m | 46 | 4.440-939.0 | 5m extension hose for FRV 30. Connection sleeve included. | |
| Add-on kit hose attachment | 47 | 2.642-528.0 | Suction cup for fixing the suction hose to smooth surfaces. | |
| Add-on kit dirt trap | 48 | 2.642-532.0 | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. | |
| Hard surface cleaner FR 30 | | | | |
| Surface Cleaner FR 30 | 49 | 2.642-997.0 | Up to 10 times greater area coverage compared with the conventional high pressure jet. | |
| Hard surface cleaner FR 30 ME | | | | |
| FR 30 ME surface cleaner | 50 | 2.640-355.0 | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. | |
| Hard Surface Cleaner FR 50 | | 1 | | |
| FR 50 surface cleaner | 51 | 2.640-679.0 | Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system. | , |
| Machine-specific nozzle kit for FR | | | | |
| Nozzle kit for FR, 650 l/h - 850 l/h | 52 | 2.639-187.0 | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h). | |
| Machine-specific nozzle kits for FRV | | | | |
| Nozzle kit for FRV, 050 | 53 | 2.642-433.0 | Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30. | |
| Hard surface cleaner FRV 30 Me | | | | |
| FRV 30 ME | 54 | 2.642-911.0 | Surface cleaner with integrated waste water pick-up | |
| Extension hose FRV 30 Me and FRV 50 Me | 55 | 4.441-040.0 | 5 m extension hose for FRV 30 Me. Includes connecting adapter. | |
| FOAM SYSTEMS | | | | |
| Cup foam lance | | | | |
| Cup foam lance Advanced | 56 | 6.394-969.0 | | |

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0



| | | | | T |
|--|--------|-------------|---|---|
| | | | | |
| | | Order no. | Description | |
| FOAM SYSTEMS | | | | _ |
| Cup foam lance | 1 | | | |
| 1-litre cleaning agent container for cup foam lance basic | 57 | 5.071-414.0 | | l |
| 1-litre cleaning agent container for cup foam lance advanced | 58 | 6.414-050.0 | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0). | |
| Inno Foam Set | | | | |
| Inno foam kit with detergent injector | 59 | 2.640-151.0 | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. | |
| Easy Foam Set | | | | |
| Easy Foam Set with RM injector | 60 | 2.640-691.0 | HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | |
| Nozzle kits for Inno/Easy Foam Set | | | | |
| Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h | 61 | 2.640-688.0 | Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 I/h. For optimal foam system performance. | |
| MIXERS AND INJECTORS | | | | |
| HP detergent injector | | | | |
| Detergent injector for high pressure | 62 | 3.637-170.0 | Cleaning agent dosage at high pressure 3 - 5 % | |
| Detergent injector for high and low pressure (without nozzles) | 63 | 3.637-001.0 | Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%. | T |
| Machine-specific nozzle kit with order no. 3.6 | 37-170 |) | | |
| Nozzle insert trapezoidal thread HDS-GER | 64 | 4.769-011.0 | For HD/HDS 750 – 1000 l/h. Consists of nozzle insert + HP power nozzle + union | Ι |
| Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h | 65 | 4.769-047.0 | | |
| Nozzle insert with order no. 3.637-001 | | | | |
| Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h. | 66 | 4.769-003.0 | Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h. | I |
| Low pressure for units rated up to 1100 l/h | 67 | 4.769-001.0 | For low pressure with machines up to 1.100 l/h | + |
| QUICK CONNECT | | | | |
| Quick coupling | 68 | 6.401-458.0 | For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 × 1,5 female | |
| | 69 | 6.401-459.0 | Hardened stainless steel nipple for quick coupling 6.401-458. With M22 × 1,5 male. | - |
| Plug nipple | | | | 1 |
| Plug nipple DRUM AND TANK CLEANING | | | | |

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0

81

80

79



83

84

82

| | | Order no. | Description | | |
|----------------------------------|----|-------------|---|-----|--|
| OTHER HP ACCESSORIES | | | | | |
| Starting current limiter | 71 | 2.637-495.0 | Reduces starting current in single-phase supply and protects line fuse. | | |
| COUPLING PARTS | | | | | |
| Rotary coupling | | | | | |
| Rotary coupling | 72 | 4.401-091.0 | Kårcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22×1.5 m. With grip protection. | | |
| Coupling | | | | - | |
| Coupler -2xM22x1,5 | 73 | 4.403-002.0 | Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2 \times M 22 \times 1.5$ m. | | |
| Connector | | | | | |
| Nozzle connector/screw connector | 74 | 4.402-022.0 | Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: $1 \times M 22 \times 1.5$ and $1 \times M 18 \times 1.5$. | | |
| Y distributor | 75 | 4.405-048.0 | Offers the option to connect two spray units to the machine. Installation on the high pressure | | |
| | 76 | 4.111-024.0 | outlet. | | |
| Adapter | | | | | |
| Adapter M22 – Swivel | 77 | 4.424-004.0 | M22 \times 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection. | n 🗆 | |
| Adapter EASY!Lock | | | | | |
| Adapter 1 M22AG-TR22AG | 78 | 4.111-029.0 | Adapter 1 to connect the old hose with the new hose | | |
| Adapter 2 M22IG-TR22AG | 79 | 4.111-030.0 | Adapter 2 to connect the old device with the new hose and the old gun with the new hose | | |
| Adapter 3 M22IG-TR22AG | 80 | 4.111-031.0 | Adapter 3 to connect the old gun with the new spray lance and new servo regulator | | |
| Adapter 5 TR22IG-M22AG | 81 | 4.111-033.0 | Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance | | |
| Adapter 6 TR22IG-M22AG | 82 | 4.111-034.0 | Adapter 6 to connect the new device with the old hose and the old hose with the new gun | | |
| Adapter 7 M18IG-TR20AG | 83 | 4.111-035.0 | Adapter 7 to connect the old spray lance with the new nozzle | | |
| Adapter 8 TR20IG-M18AG | 84 | 4.111-036.0 | Adapter 8 to connect the new spray lance with the old nozzle | | |

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0

| | 8 | | | |
|--|----|---------------|---|---|
| 93 | 9 | 5 | 96-97 98 | |
| | | Order no. | Description | |
| COUPLING PARTS | | | | |
| Adapter EASY!Lock | | | | |
| ADAPTER for replacement TR22IG-M22AG Er | 85 | 4.111-046.0 | Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection | |
| HOSE REELS | | | | - |
| Automatic, self-winding hose reels | | | | |
| Automatic stainless steel hose reel, 20 m | 86 | 6.391-520.0 | | |
| Automatic stainless steel hose reel, 40 m | 87 | 6.392-442.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit). | |
| Powder-coated swivel holder | 88 | 2.639-931.0 | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel. | |
| Stainless steel swivel holder | 89 | 2.641-867.0 | Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose. | |
| Automatic plastic hose reel incl. high-pressure hose, 15 m | 90 | 2.639-257.0 | | |
| Automatic hose reel, powder-coated steel / plastic, 20 m | 91 | 6.392-074.0 | Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic. | |
| Automatic stainless steel / synthetic material hose drum, 20 m | 92 | 6.392-083.0 | Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic. | |
| Automatic hose reel, coated, 20 m | 93 | 6.392-106.0 | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. | |
| Hose reel, automatic, basalt grey-coated, 20 m | 94 | 6.392-105.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. | |
| Automatic hose reel, stainless steel, includes swivel holder, 20 m | 95 | 6.392-076.0 | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose. | |
| WET BLASTING ATTACHMENT | | | | |
| Wet blasting attachment (without nozzle) | | 4 7 60 7 17 1 | | |
| Wet blasting attachment with flow control (without nozzles) | 96 | 4.762-010.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. | |
| Wet blasting attachment without flow control (nozzles not included) | 97 | 4.762-022.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control. | |
| Nozzle pack for wet blasting attachment | | | | |
| Nozzle kit for wet blasting attachment 050 | 98 | 2.637-902.0 | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022. | |

EQUIPMENT FOR HD 7/11-4 CAGE CLASSIC 1.367-318.0



107



108



109



110







