

HDS 2000 SUPER

Twin-pump hot water pressure washer for two person operation.











Order no.

1.071-934.0

- Two powerful pump units
- Electronic service control with flame monitorcleaning agent dosing can be controlled from the trigger gun
- cleaning agent dosing can be controlled inc


| 2 | Technical data | | |
|---|---------------------------|-------------|-------------------|
| | EAN code | | 4054278172392 |
| | Current type | Ph / V / Hz | 3 / 400 / 50 |
| | Flow Rate | l/h | 800 - 1850 |
| | Operating pressure | bar / MPa | 30 - 180 / 3 - 18 |
| | Temperature (supply 12°C) | °C | min. 80 - max. 98 |
| | Consumption fuel oil | kg/h | 12.3 |
| | Power rating | kW | 2 × 6.7 |
| | Power cable | m | 5 |
| | Fuel tank | 1 | 25 |
| | Weight (with accessories) | kg | 304.7 |
| | Weight incl. packaging | kg | 320.7 |
| | Dimensions (L × W × H) | mm | 1500 × 834 × 1015 |
| | | | |

| Equipment | | |
|--------------------------------------|----|---------------------|
| Trigger gun | | EASY!Force Advanced |
| High-pressure hose | m | 15 / Longlife |
| Spray lance | mm | 1050 |
| Power nozzle | | • |
| Galvanized and powder coated chassis | | |
| Three piston axial pump | | with ceramic piston |
| Pressure switch control | | |
| Optional two-lance operation | | • |
| Pole reversing plug (three-phase) | | • |
| SDS system | | • |
| Electronic service control | | |
| 2 pump units with ceramic sleeves | | |
| Two detergent tanks | | |
| Dry running protection | | |
| - | | |

Included in delivery.

KARCHER

This device does not require instruction.

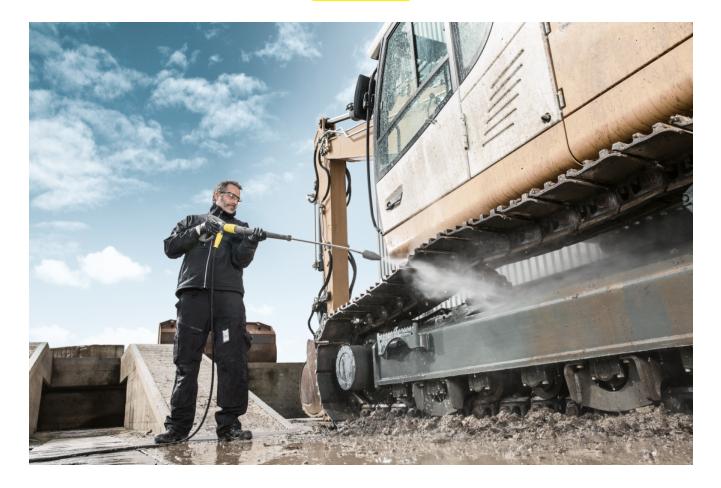



Duo drive concept

- Two fatigue tested, water-cooled three-phase motors.
- Delayed start prevents mains overload.
- Powerful for two-lance use.



Service control

- Electronic machine monitoring to protect against disturbances.
- Service interval display via LED.



Burner technology (oil-heated)

- Highly efficient burner technology.
- Spiral heating coil for a compact design.

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0



| | | Order no. | Description | |
|--|----|-------------|--|--|
| TRIGGER GUNS | | | | |
| Trigger guns | | | | |
| EASY!Force Advanced | 1 | 4.118-005.0 | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. | |
| Conversion kit 1 from high pressure hose | 2 | 4.111-050.0 | A conversion kit which enables secure connection from an M22 hose onto our innovative EASY!Force trigger gun. The kit includes the EASY!Force Trigger gun, adaptors and lance. | |
| Conversion kit 2 from device | 3 | 4.111-051.0 | Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose. | |
| Conversion kit 3 only EASY!Force | 4 | 4.111-052.0 | A conversion kit for the EASY!Force gun, which includes the correct adaptors to conncect to the M22 style lance and hose. | |
| Servo Control | | | | |
| Servo Control, 1100 l/h - | 5 | 4.118-009.0 | Servo control for water flow and pressure control (> 1100 l/h) on the trigger gun. | |
| SPRAY LANCES | | | | |
| Rotating spray lances | | | | |
| Spray lance, 1050 mm, rotatable | 6 | 4.112-000.0 | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| LED nozzle light | 7 | 2.680-002.0 | LED work light for assembly on EASY!Force spray lances, providing a clear view in poor lighting conditions ensuring controlled cleaning results. | |
| Spray lance, 250 mm, rotatable | 8 | 4.112-027.0 | 250 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 400 mm, rotatable | 9 | 4.112-024.0 | 400 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 600 mm, rotatable | 10 | 4.112-007.0 | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 840 mm, rotatable | 11 | 4.112-006.0 | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 1550 mm, rotatable | 12 | 4.112-018.0 | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 2050 mm, rotatable | 13 | 4.112-021.0 | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance extender, 1000 mm | 14 | 4.112-048.0 | Spray lance extension with EASY!Lock connection. Length 1000 mm. | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0



| | | Order no. | Description | |
|--|----|-------------|---|---|
| SPRAY LANCES | | | | |
| Double lance | | | | |
| Double lance, 960 mm | 15 | 2.112-016.0 | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). | |
| Angular spray lance | | • | | |
| WC and gutter lance | 16 | 4.112-029.0 | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. | |
| Flexible spray lance | | | | |
| Flexible lance, 1050 mm | 17 | 4.112-035.0 | 1050 mm flexible lance with variable bend from 20° to 140° , ideal for cleaning difficult to reach areas, e.g. gutters. | |
| High pressure articulated joint | 18 | 4.112-057.0 | For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer. | |
| Gutter cleaner | | | | |
| Gutter cleaning lance | 19 | 2.112-015.0 | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. | |
| Undercarriage spray lance | | | | |
| Underbody lance | 20 | 4.112-032.0 | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. | |
| Additional handle | | | | |
| Additional handle for EASY!Lock spray lances | 21 | 4.321-380.0 | Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. | |
| KÄRCHER POWER NOZZLE | | | | |
| Power nozzle spray angle 25° | | | | |
| Power Nozzle 25°, 110 | 22 | 2.113-018.0 | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains. | |
| HP nozzle spray angle 0° | | 1 | | |
| Power Nozzle 0°, 110 | 23 | 2.113-039.0 | Solid jet for very stubborn dirt and stains. | |
| Power nozzle spray angle 15° | | | | 1 |
| Power Nozzle 15°, 100 | 24 | 2.113-052.0 | Fan jet nozzle for stubborn dirt and stains. | |
| Power nozzle spray angle 40° | | 1 | | - |
| Power Nozzle , 130 | 25 | 2.113-067.0 | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. | |
| ROTARY NOZZLES (DIRT BLASTERS) | | | | |
| Dirt blaster, large | | | | |
| Dirt Blaster Nozzle, large, 120 | 26 | 4.114-044.0 | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. | |
| MULTIPLE-JET NOZZLES | | | | |
| Angle vario nozzle 0°-90° | | | | |
| Angled Vario Nozzle, 055 | 27 | 4.113-008.0 | Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces. | |
| NOZZLE UNION / SPACER | | | | |
| Nozzle union | | | | |
| Nozzle screws | 28 | 4.112-011.0 | Nozzle screws with protectors for high-pressure and power nozzles | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0

41

42

40



| HIGH-PRESSURE HOSES | | Order no. | Description | |
|---|--------|-------------|--|--|
| Standard with unions on both sides | | | | |
| High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock | 29 | 6.110-031.0 | 10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. | |
| High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock | 30 | 6.110-030.0 | 15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. | |
| High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock | 31 | 6.110-032.0 | 20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. | |
| Longlife 400 with unions on both sides | | | | |
| High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 × EASY!Lock | 32 | 6.110-024.0 | 1.5 m high-pressure hose (DN 8, M 22 \times 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 \times 1.5). | |
| Food industry version with unions on both side | es | • | | |
| High-pressure hose food grade, 10 m, DN 8, 250 bar, 2 × EASY!Lock | 33 | 6.110-051.0 | 10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve. | |
| High-pressure hose food grade, 20 m, DN 8, 250 bar, 2 × EASY!Lock | 34 | 6.110-052.0 | 20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar. | |
| Longlife food industry version with unions on l | both s | ides | | |
| High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock | 35 | 6.110-053.0 | With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends. | |
| PIPE CLEANING | | | | |
| Pipe cleaning hose, ID 6 | | | | |
| Hose assembly TR pipe cleaning DN6 max.2 | 36 | 6.110-046.0 | The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, DN 6, 20 m, 220 bar | 37 | 6.110-008.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). | |
| Hose assembly TR pipe cleaning DN6 max.2 | 38 | 6.110-047.0 | The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| FLOOR AND HARD SURFACE CLEANER | | | | |
| Hard Surface Cleaner FRV 30 | | | | |
| Add-on kit hose attachment | 39 | 2.642-528.0 | Suction cup for fixing the suction hose to smooth surfaces. | |
| Add-on kit dirt trap | 40 | 2.642-532.0 | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. | |
| Machine-specific nozzle kits for FRV | | • | | |
| Nozzle kit for FRV, 080 | 41 | 2.642-982.0 | Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30. | |
| Hard surface cleaner FRV 30 Me | | | | |
| Extension hose FRV 30 Me and FRV 50 Me | 42 | 4.441-040.0 | 5 m extension hose for FRV 30 Me. Includes connecting adapter. | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0

| 50 | 5 | 2 | 46 47 48 49 Image: Imag | |
|---|----|-------------|--|--|
| | | | | |
| | | Order no. | Description | |
| FLOOR AND HARD SURFACE CLEANER | | | | |
| Surface Cleaner FR 50 Me | | I | | |
| FRV 50 Me surface cleaner | 43 | 2.111-024.0 | Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C. | |
| FOAM SYSTEMS | | | | |
| Cup foam lance | | | | |
| Cup foam lance Basic 3, 900 l/h - 2500 l/h | 44 | 4.112-055.0 | For high-pressure cleaners with a flow rate of 900-2500 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent. | |
| 1-litre cleaning agent container for cup foam lance basic | 45 | | | |
| 1-litre cleaning agent container for cup foam lance advanced | 46 | 6.414-050.0 | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0). | |
| Cup foam lance Advanced 3, 900 l/h - 2500 l/h | 47 | 4.112-065.0 | | |
| Cup foam lance DUO Advanced 3, 900 I/h - 2500 I/h | 48 | 4.112-069.0 | | |
| Inno Foam Set | | | | |
| Inno foam kit with detergent injector | 49 | 2.112-000.0 | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For | |
| Inno foam kit | 50 | 2.112-008.0 | use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. | |
| Easy Foam Set | | | | |
| Easy Foam Set with RM injector | 51 | 2.112-010.0 | HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine | |
| Easy foam set | 52 | 2.112-011.0 | specific nozzle kit has to be ordered separately. | |
| Nozzle kits for Inno/Easy Foam Set | | | | |
| Nozzle kit 110 Inno/Easy set 1000 - 1300 l/h | 53 | 2.111-020.0 | Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance. | |
| Foam nozzle mounting kit | | | | |
| Foam nozzle kit | 54 | 2.112-013.0 | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary. | |
| MIXERS AND INJECTORS | | | | |
| HP detergent injector | | | | |
| Detergent injector for high and low pressure (without nozzles) | 55 | 4.637-032.0 | Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%. | |
| Detergent injector for high pressure | 56 | 4.637-033.0 | Cleaning agent dosage at high pressure 3 - 5 % | |

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0



| | | Order no. | Description | |
|---|----|-------------|--|-----|
| MIXERS AND INJECTORS | | | | |
| Machine-specific nozzle kit with order no. 3.63 | | | | |
| Nozzle insert trapezoidal thread | 57 | 4.769-013.0 | For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union | |
| Nozzle insert with order no. 3.637-001 | | 1 | | |
| High pressure for units rated 1100 l/h or more | 58 | 4.769-002.0 | For high pressure with machines above 1.100 l/h | |
| Low pressure for units rated 1100 l/h or more | 59 | 4.769-006.0 | For low pressure with machines above 1.100 l/h | |
| QUICK CONNECT | | | | |
| Quick-fitting pipe union coupler trapezo | 60 | 2.115-000.0 | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 \times 1.5 internal thread. | |
| Quick-fitting pipe union plug nipple tra | 61 | 2.115-001.0 | Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread. | |
| DRUM AND TANK CLEANING | | | | |
| Add-on kit mud sucker | 62 | 2.641-798.0 | | |
| OTHER HP ACCESSORIES | | | | |
| Jet gun | 63 | 2.869-067.0 | Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. | |
| FLUE PIPE | | | | |
| Flue gas adapter | 64 | 4.656-079.0 | Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system). | |
| COUPLING PARTS | | | | |
| Rotary coupling | | | | |
| Rotary coupling | 65 | 4.111-021.0 | Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection. | |
| Connector | | | | |
| Nozzle connector/screw connector | 66 | 4.111-022.0 | Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 × 1.5 and 1x M 18 × 1.5. | |
| Y distributor | 67 | 4.111-024.0 | Offers the option to connect two spray units to the machine. Installation on the high pressure outlet. | |
| Short spray unit | 68 | 4.111-038.0 | For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles. | t 🗆 |
| Adapter EASY!Lock | | | 1 | _ |
| Adapter 1 M22AG-TR22AG | 69 | 4.111-029.0 | Adapter 1 to connect the old hose with the new hose | |
| Adapter 2 M22IG-TR22AG | 70 | 4.111-030.0 | Adapter 2 to connect the old device with the new hose and the old gun with the new hose | |
| | | | 1 | _ |

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0




| Adapter M22 – Swivel | 72 | 4.111-032.0 | M22 × 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection. | |
|---|----|-------------|--|--|
| Adapter 5 TR22IG-M22AG | 73 | 4.111-033.0 | Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance | |
| Adapter 6 TR22IG-M22AG | 74 | 4.111-034.0 | Adapter 6 to connect the new device with the old hose and the old hose with the new gun | |
| Adapter 7 M18IG-TR20AG | 75 | 4.111-035.0 | Adapter 7 to connect the old spray lance with the new nozzle | |
| Adapter 8 TR20IG-M18AG | 76 | 4.111-036.0 | Adapter 8 to connect the new spray lance with the old nozzle | |
| Coupler -2xM22x1,5 | 77 | 4.111-037.0 | Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2 \times M 22 \times 1.5$ m. | |
| ADAPTER for replacement TR22IG-M22AG Er | 78 | 4.111-046.0 | Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection | |
| HOSE REELS | | | | |
| Automatic, self-winding hose reels | | | | |
| Automatic plastic hose reel incl. high-pressure hose, 15 \mbox{m} | 79 | 2.639-257.0 | | |
| Automatic hose reel, powder-coated steel / plastic, 20 m | 80 | 6.392-074.0 | Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic. | |
| Automatic stainless steel / synthetic material hose drum, 20 m | 81 | 6.392-083.0 | Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic. | |
| Automatic hose reel, coated, 20 m | 82 | 6.392-106.0 | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. | |
| Hose reel, automatic, basalt grey-coated, 20 m | 83 | 6.392-105.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. | |
| Automatic hose reel, stainless steel, includes swivel holder, 20 m | 84 | 6.392-076.0 | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose. | |

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0

96

97

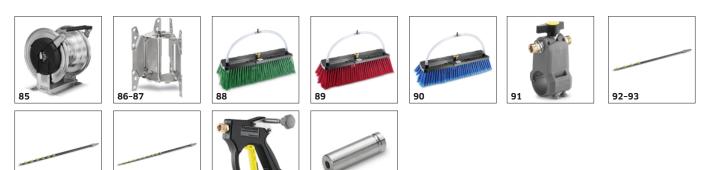

98

| | | Order no. | Description | |
|--|----|-------------|---|-----|
| HOSE REELS | | | | |
| Automatic, self-winding hose reels | | | | |
| Automatic stainless steel hose reel, 40 m | 85 | 6.392-442.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit). | |
| Powder-coated swivel holder | 86 | 2.639-931.0 | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel. | |
| Stainless steel swivel holder | 87 | 2.641-867.0 | Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose. | |
| FACADE AND SOLAR PANEL CLEANING | | | | |
| Brushes | | | | |
| Brush hard | 88 | 6.960-133.0 | Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher. | |
| Brush medium | 89 | 6.960-134.0 | Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher. | |
| Brush soft | 90 | 6.960-135.0 | For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems. | |
| Telescopic | | | | |
| TL low pressure adapter | 91 | 4.580-097.0 | TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes. | |
| Telescopic lance TL 7 F | 92 | 4.762-609.0 | Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension. | |
| Telescopic lance TL 7 H | 93 | 4.762-610.0 | Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix Telescopic thanks to quick-release fastenings. Up to 7 m reach. | . 🗆 |
| Telescopic lance TL 10 H | 94 | 4.762-611.0 | Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. | |
| Telescopic lance TL 10 C | 95 | 4.762-612.0 | Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels. | |
| Telescopic lance TL 14 C | 96 | 4.762-613.0 | Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners. | |
| TL high pressure adapter | 97 | 4.775-154.0 | TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals. | |
| WET BLASTING ATTACHMENT | | | | |
| Boron carbide nozzle | | | | |
| Boron carbide nozzle, for machines as of 1000 I/h | 98 | 6.415-083.0 | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation. | |

□ Available accessories.

94-95

HDS 2000 Super, 1.071-934.0, 2023-07-30

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0

















| | | Order no. | Description | |
|--|-----|-------------|---|------|
| DRUM AND TANK CLEANING | | | | |
| Barrel and tank cleaning | | | | |
| Barrel cleaner BC 14/12 | 99 | 2.112-020.0 | The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums – in particular oak barrels with a capacity between 225 and 600 liters. | |
| WATER CONNECTION | | | | |
| Geka coupling | | | | |
| With hose nozzle, R 3/4" | 100 | 6.388-455.0 | with hose liner | |
| With hose nozzle, R 1" | 101 | 6.388-465.0 | with hose barb | |
| Hose coupling | 102 | 6.388-458.0 | with female thread | |
| Suction filter | | | | |
| Water filter | 103 | 6.414-956.0 | Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve | |
| Suction filter with check valve | 104 | 4.730-012.0 | Brass suction filter suitable for ponds, storage tanks, etc. With check valve. | |
| Fine-mesh water filter | | | | |
| Add-on kit water filter universal | 105 | 2.637-020.0 | | |
| Fine-mesh water filter with adapter | 106 | 4.730-102.0 | Fine-mesh water filter, 125μ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter 1". | ·, □ |
| Fine-mesh water filter, 100 µm, R 1" | 107 | 2.638-270.0 | Fine-mesh water filter, 100μ m, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 I/h. Connector 1". | 5 🗆 |
| Water supply hose | | | | |
| Water supply hose | 108 | 4.440-207.0 | NW 19 R1" / R 3/4", up to 85 °C, for pick-up | |
| | 109 | 4.440-270.0 | NW 19 R1" / R1", up to 85 °C | |
| Backflow check valve | | 1 | | - |
| Backflow preventer | 110 | 2.641-374.0 | To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. – hot water resistant up to 80 °C – tested according to IEC 60335-2-79 – integrated leakage protection | |
| WASHING BRUSHES | | | | |
| Push-on washing brush | | | | |
| Push-on wash brush, M 18 \times 1.5 | 111 | 4.113-001.0 | Push-on wash brush for universal use. Simply push on to lance. Connector: M 18×1.6 . | |
| Rotating washing brush | | | | |
| Rotating wash brush for > 800 l/h machines, nylon bristles | 112 | 4.113-002.0 | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 \times 1.5 (replaceable brush insert). | |
| | | | | |

HDS 2000 Super, 1.071-934.0, 2023-07-30

EQUIPMENT FOR HDS 2000 SUPER 1.071-934.0



| | | Order no. | Description | |
|---|-----|-----------|--|--|
| WASHING BRUSHES | | | | |
| Rotating washing brush | | | | |
| Rotating wash brush for > 800 l/h machines, natural bristles | 113 | | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60° C, M 18 × 1.5 (replaceable brush insert). | |